

# **Standard Equipment and Features**

- >> 11½ Horse Power Motor
- >> 208/240 Volt
- >> 10 Amp draw
- >> Single Phase
- >> Gear-Driven Transmission
- >> 30-Minute Timer with automatic shut-off
- >> 3-Speed
- >> #12 Attachment Hub
- >> Safety Bowl Guard
- >> Bowl Lift Safety
- >> Dough Hook
- >> Wire Whip
- >> Beater/Paddle
- >> Stainless Steel Bowl
- >> Bowl Locking Handles
- >> Bowl Stabilizer
- >> Industry Leading 3-Year-Limited Parts Warranty
- >> 1-Year Full Parts and Labor Warranty

# **Optional Accessories**

- >> 20-quart Knockdown Plate
- >> 20-quart Bowl
- >> Whip, Beater, and Hook for 20-quart Bowl

Please specify when ordering mixer.



# **Built to Last . . . Priced to Save!**

Precision North America, LLC. 60 Commerce Ave. Albany, New York 12206






www.precisionmixers.com • Phone: 1-877-R-MIXERS (1-877-764-9377) • Fax: 518-462-3389

# **Model HUB-40**



# **Specifications and Dimensions**

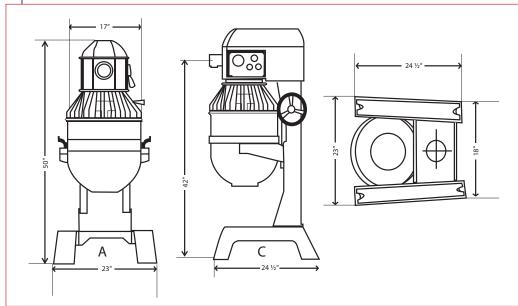

#### Electrical:

- 208/240Volt
- 1-Phase Power
- Entela Approved

# Weight:

- 462 Pounds Net
- 562 Domestic shipping

# Warranty:

- 3-Year Limited Parts, (Motor, Transmission, and Drive-Train).
- 1-Full Year Parts and Labor.

# **Amp Draw Specifications**

Phase	Volts	Amps
1	208/240	10

#### **Dimensions**

### Mixer Body:

A: 23" Wide B: 50" High C: 24½" Depth

#### Bowl:

Outside w/handles: 21½"

Inside: 15<sup>3</sup>/<sub>8</sub>" Height: 16<sup>1</sup>/<sub>4</sub>"

# NOTE: Hub attachment not to be used while mixing

# **Benefits**

#### Motor:

- Heavy-Duty, 1½ Horse Power Motor
- Manual Reset Motor Overload

#### **Bowl Lift:**

• Locks in any position

#### **Bowl Stabilizer:**

 Flat Exterior Bowl Base for Bowl Stability

#### **Attachment Hub:**

• Uses standard # 12 attachments

#### **Power Supply:**

• 7" Length Power Cord

#### Timer:

•Automatic shutoff at desired mixing time

# Easy Maintenance and Service National Network of Service Professionals

# Safety features

#### **Bowl Guard:**

• Auto shut-off when bowl guard is opened.

#### Lift Safety:

• Auto shut-off when bowl is lowered.

Speed	Agitator RPMs	Attachment Hub RPM's
1	55	96
2	105	183
3	230	402

Specifications are subject to change.

Precision North America, LLC. 60 Commerce Ave. Albany, New York 12206





www.precisionmixers.com • Phone: 1-877-R-MIXERS (1-877-764-9377) • Fax: 518-462-3389